


Wattage Select + 3CCT Quick Fit Batten

HUGO's Generation 2 LED Batten with wattage select and colour select options has been designed with reliable integrated technology ensuring maintenance free installation resulting in long life. 120 lumens per watt makes it one of the most efficient Battens in the market.

The curved design makes this suitable for both commercial and residential applications.



The opal diffuser supplies even illumination whilst minimising glare.

Quick Fit with push terminals, detachable light source from base for easy mounting. Clean and modern design.

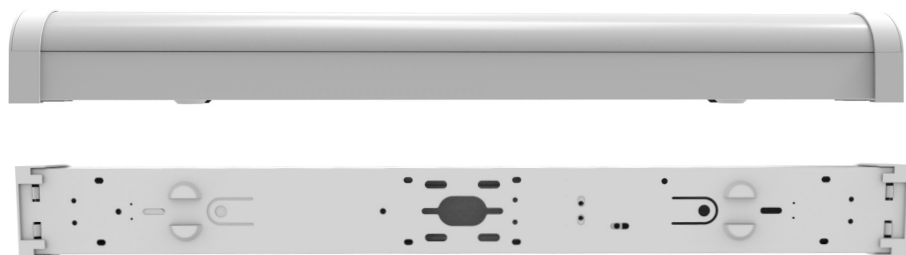

Key Features

- Wattage Select
- 3CCT - 3,000K, 4,000K, 6,500K
- 120lm/W
- Quick connect with centre and end feed options
- 2x sizes available 1,200mm and 1,500mm
- Long life 50,000hr L70 @ 25deg
- 3 way push terminals
- Surface or suspended mounting options

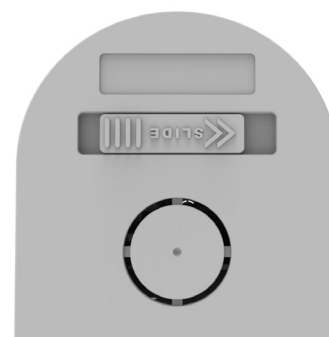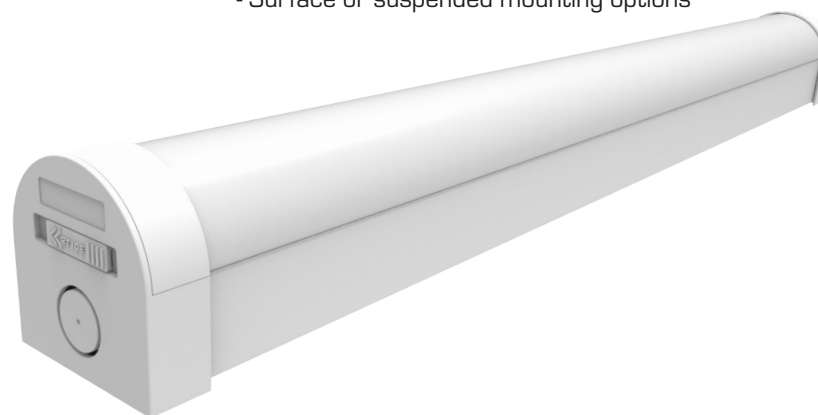

SKU Code	BAT1200-3	BAT1500-3
Input	220-240V	
Wattage	20 / 40W	30 / 60W
Lumens	4,800lm @ 4K	7,200lm @ 4K
Lm/W	120lm/W	
Colour Temp	3,000K 4,000K 6,500K	
CRI	>80	
Beam Angle	120deg	
IP	IP20	
IK	IK03	
Dimensions	63.5x1,200mm	63.5x1,500mm
Projection	65mm	
Weight	1.37kg	1.64kg
PF	>0.9	
Temp. Rated	- 20 + 40 deg C	
Operation Humidity	20 - 80 deg C	
Flicker	Free	
Dimmable	No	
Center Feed	Yes	
Termination	Push loop in/out	
Surge Protection	1kv	
Life	L70B50 50,000hr @ 25 deg C	
Inrush Current	20A	25A
Class	I (earth)	
Input Current	260mA	400mA
Diffuser	PC	
End Cap	PC	
Body	PC Cover / SPCC Steel Base	
Warranty	3yr	
Default Factory Setting	40W 4,000K	60W 4,000K
Accessory	BATSK Suspended 2m Kit	